

RIEGL VZ-1000

very long range up to 1400 m
very high speed data acquisition
wide field-of-view, controllable while scanning
high-accuracy, high-precision ranging based on echo digitization and online waveform processing
multiple target capability
superior measurement capability in adverse atmospheric conditions
high-precision mounting pads for optional digital camera
integrated inclination sensors and laser plummet
integrated GPS receiver with antenna
various interfaces (LAN, WLAN, USB 2.0)
internal data storage capability

The V-Line® 3D Terrestrial Laser Scanner **RIEGL VZ-1000** provides high speed, non-contact data acquisition using a narrow infrared laser beam and a fast scanning mechanism. High-accuracy laser ranging is based upon **RIEGL's** unique echo digitization and online waveform processing, which allows achieving superior measurement capability even under adverse atmospheric conditions and the evaluation of multiple target echoes.

The line scanning mechanism is based upon a fast rotating multi-facet polygonal mirror, which provides fully linear, unidirectional and parallel scan lines. The **RIEGL VZ-1000** is a very compact and lightweight surveying instrument, mountable in any orientation and even under limited space conditions.

Modes of Operation

stand-alone data acquisition without the need of a notebook, basic configuration and commanding via the built-in user interface

remote operation via RiSCAN PRO on a notebook, connected either via LAN interface or integrated WLAN

well-documented command interface for smooth integration into mobile laser scanning systems

Interfacing to Post Processing Software

User Interfaces

integrated Human-Machine Interface (HMI) for stand-alone operation without computer

high-resolution 3,5" TFT color display, 320 x 240 pixel, scratch resistant cover glass with anti-reflection coating and multi-lingual menu

water and dirt resistant key pad with large buttons for instrument control

loudspeaker for audible signaling of messages by voice

Topography & Mining

As-Built Surveying

Architecture & Facade Measurement

Archaeology & Cultural Heritage Documentation

City Modelling

Civil Engineering

visit our website
www.riegl.com



RIEGL®
LASER MEASUREMENT SYSTEMS

System Configuration



Scanner Hardware **RIEGL VZ-1000**

allows high-speed, high resolution and accurate 3D measurements

Range up to 1400 m @ Laser Class 1

Repeatability 5 mm

Measurement rate up to 122 000 measurements/sec

Field of View up to 100° x 360°

LAN/WLAN data interface, easily allowing wireless data transmission

Operated by any standard PC or Notebook or cable less

Fully portable, rugged & robust

Software **RiSCAN PRO**

RIEGL software package for scanner operation and data processing

Data archiving using a well-documented tree structure in XML file format

Object VIEW / INSPECTOR for intelligent data viewing and feature extraction

Straightforward Global Registration

Interfacing to Post Processing Software



Digital Camera (optional)

provides high resolution calibrated color images

NIKON D700, NIKON D300(s)

- D700: 12.1 Megapixel, Nikon FX format

- D300(s): 12.3 Megapixel

- USB interface

Mounting device with digital camera can be easily fixed by means of two knurled head screws. Precise position and orientation is provided by three supporting points. Power supply and USB 2.0 interface is provided by the scanner directly.

The combination of the key components **Scanner, Software and Camera** results in

Automatic generation of high resolution textured meshes

- Photorealistic 3D reconstruction

- Exact identification of details
- Online position and distance measurements
- Online setting of any virtual point of view

Global Scan Position Registration



Stand-alone Registration

integrated GPS receiver (L1)

integrated biaxial inclination sensors

(tilt range $\pm 10^\circ$, accuracy typ. $\pm 0.008^\circ$)

RiSCAN PRO Processing and Multistation Adjustment Module (MSA)

Registration via control points

precise and fast fine scanning of retro-reflectors

RiSCAN PRO Processing


Totalstation-like-Registration

setup above well known point (integrated laser plummet)

integrated inclination sensors

precise fine scanning of well known remote target (reflector)

RiSCAN PRO Processing Backsighting function

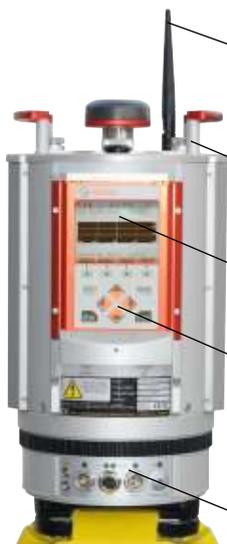

WLAN antenna

Carrying handles

High-resolution color TFT display

Key pad for instrument control

Connectors for power supply and LAN interface 10/100 MBit/sec, power off/on button

Communication and Interfaces

LAN interface 10/100/1000 MBit/sec within rotating head
 LAN interface 10/100 MBit/sec within base integrated WLAN interface with rod antenna
 USB 2.0 for external storage devices (USB flash drives, external HDD)
 USB 2.0 for connecting the optional digital camera
 connector for GPS antenna
 two connectors for external power supply
 connector for external GPS synchronization pulse (1PPS)

TOP VIEW



Mounting points (3x) and mounting threads inserts (2x) for digital camera

Connector for GPS antenna (optional)

USB and DC power connector for digital camera

Connector for GPS antenna

Connector for WLAN antenna

USB 2.0 slot for external memory devices

Scan Data Storage

- internal 32 GByte flash memory (1 GByte reserved for the operating system)
- external storage devices (USB flash drives or external hard drives) via USB 2.0 interface



LAN 10/100/1000 MBit/sec, for rapid download of scan data

Power Supply

Add-on rechargeable battery

optional add-on rechargeable battery pack (high power, high capacity NIMH cells)
 compact disc design, short-circuit-proof and protected connection pins
 rechargeable during standard scan operation via external power supply
 integrated micro-controller based charging electronics
 easily pluggable to base of the laser scanner by central locking screw
 DC voltage source (11-32 V DC) sufficient for recharging



External power supply

Intelligent power supply management, up to three independent external power sources can be connected simultaneously for uninterrupted operation
 Reliable under- and over voltage protection
 Wide external voltage supply range 11-32 V DC
 Power consumption typ. 82 W
 LED indicators for power status

Technical Data 3D Scanner Hardware RIEGL VZ[®]-1000

Laser Product Classification

Class 1 Laser Product according to IEC60825-1:2007

The following clause applies for instruments delivered into the United States: Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.



Physical Data

temperature range 0°C to +40°C (operation), -10°C to +50°C (storage)
 protection class IP64 (dust and splash-proof)
 weight approx. 9.8 kg

Range Performance¹⁾

Laser PRR (Peak) ²⁾	70 kHz	100 kHz	150 kHz	300 kHz
Effective Measurement Rate ²⁾	29 000 meas./sec.	42 000 meas./sec.	62 000 meas./sec.	122 000 meas./sec.
Max. Measurement Range ³⁾ for natural targets 90% for natural targets 20%	1400 m 700 m	1200 m 600 m	950 m ⁴⁾ 500 m	450 m ⁴⁾ 350 m
Max. Number of Targets per Pulse	practically unlimited ⁵⁾			
Accuracy ^{6) 8)}	8 mm			
Precision ^{7) 8)}	5 mm			

Minimum Range

2.5 m

Laser Wavelength

near infrared

Beam Divergence⁹⁾

0.3 mrad

- 1) with online waveform processing
- 2) rounded values, selectable by measurement program
- 3) Typical values for average conditions. Maximum range is specified for flat targets with size in excess of the laser beam diameter, perpendicular angle of incidence, and for atmospheric visibility of 23 km. In bright sunlight, the max. range is shorter than under an overcast sky.

- 4) limited by PRR
- 5) details on request
- 6) Accuracy is the degree of conformity of a measured quantity to its actual (true) value.
- 7) Precision, also called reproducibility or repeatability, is the degree to which further measurements show the same result.
- 8) One sigma @ 100 m range under RIEGL test conditions.
- 9) 0.3 mrad correspond to 30 mm increase of beamwidth per 100 m of range.

Scan Performance

Scan Angle Range

Scanning Mechanism

Scan Speed

Angular Stepwidth (vertical), (horizontal)

Angle Measurement Resolution

Inclination Sensors

GPS receiver

Compass

Internal Sync Timer

Scan Sync (optional)

Vertical (Line) Scan

total 100° (+60° / -40°)

rotating multi-facet mirror

3 lines/sec to 120 lines/sec

0.0024° 0.288°¹¹⁾

between consecutive laser shots

better 0.0005° (1.8 arcsec)

Horizontal (Frame) Scan

max. 360°

rotating head

0°/sec to 60°/sec¹⁰⁾

0.0024° 0.5°¹¹⁾

between consecutive scan lines

better 0.0005° (1.8 arcsec)

integrated, for vertical scanner setup position

integrated, L1 antenna

integrated, for vertical scanner setup position

integrated real-time synchronized time stamping of scan data

scanner rotation synchronization


10) frame scan can be disabled, providing 2D operation

11) selectable, minimum stepwidth increasing to 0.004° @ 70 kHz PRR

Max. Measurement Range

The following conditions are assumed:

Flat target larger than footprint of laser beam,
 perpendicular angle of incidence,
 average brightness

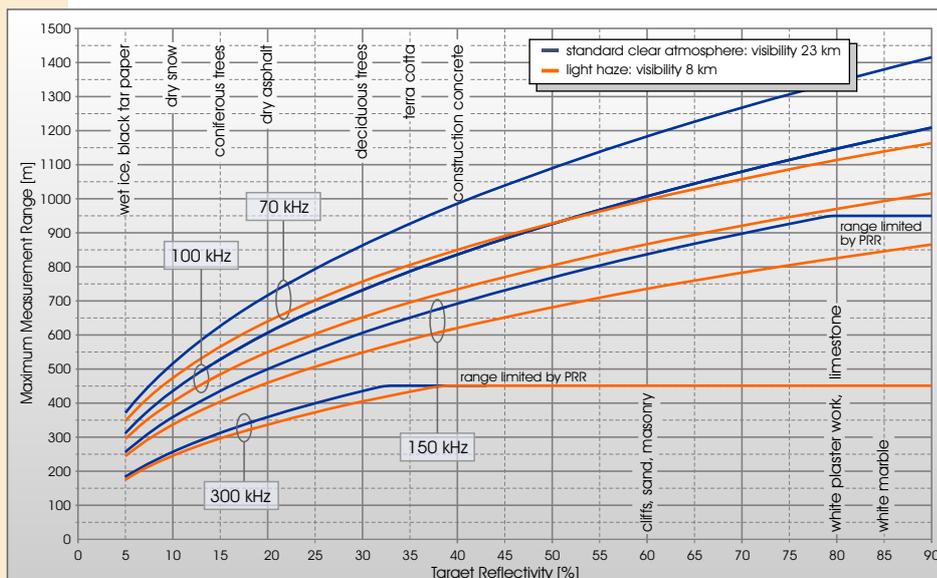

RIEGL Laser Measurement Systems GmbH, 3580 Horn, Austria
 Tel.: +43-2982-4211, Fax: +43-2982-4210, E-mail: office@riegl.co.at
 RIEGL USA Inc., Orlando, Florida 32819, USA
 Tel.: +1-407-248-9927, Fax: +1-407-248-2636, E-mail: info@rieglusa.com
 RIEGL Japan Ltd., Tokyo 1640013, Japan
 Tel.: +81-3-3382-7340, Fax: +81-3-3382-5843, E-mail: info@riegl-japan.co.jp

www.riegl.com