

SOKKIA

SX Series

Superior X-ellence Station

The New Definition of Robotics

- Extremely Accurate Auto-Tracking
- RED-tech Technology Reflectorless EDM
- Long-range Data Communication
- RC-PR5 Remote Control System
- Waterproof, Rugged, and Operator Friendly
- MAGNET™ Field On-Board Application Software



Tightly Tracks. Accurately Measures.

Extremely Accurate Auto-Tracking



Incorporating the industry's most advanced laser and image processing technologies, the SX offers prism tracking capability that leads the industry and provides exemplary performance on any job site. Advanced tracking algorithms also enhance the ability to predict future prism positions, dramatically increasing tracking stability. Even with intensive reflections from behind a prism, or with repetitive interruptions in the line-of-sight, the SX tightly tracks a moving prism.


RED-tech Technology Reflectorless EDM

- Fast distance measurement of 0.9s regardless of object.
- Sokkia traditional pinpoint precision in reflectorless distance measurement.
- Reflectorless operation from 30cm to 1,000m.*
- Coaxial EDM beam and laser-pointer provide fast and accurate aiming.
- Ensures accuracy even with reflective sheets.


*With Kodak Gray Card white side (90% reflective). Brightness level at object surface: ≤ 500 lx.

Advanced Angle Measurement System

- SX features Sokkia's original absolute encoders that provide long-term reliability in any job site condition. Dual-axis compensator ensures stable measurements even when setup on uneven terrain.
- Sokkia's traditional motion clamp and tangent screw are employed to ensure stable angle measurement.



Long-range Data Communication

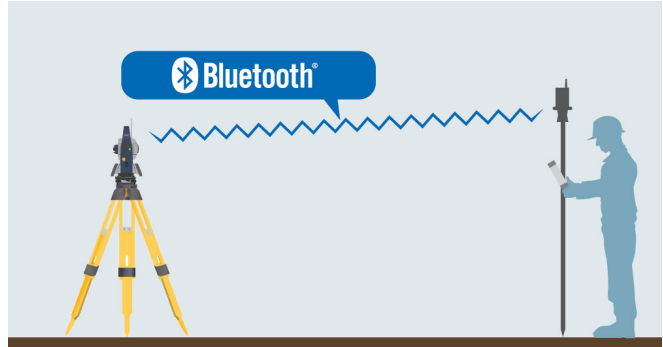

- The SX series of total stations features *Bluetooth*® Class1 wireless technology for reliable data communications.
- All SX data is instantly available at the *Bluetooth*-equipped controller.

* Wireless communication range may vary depending on obstruction and other environmental conditions.

RC-PR5 Remote Control System



The RC-PR5 On-Demand Remote allows for rapid prism search no matter your position. A built-in directional sensor constantly monitors the prism movement so the SX can turn left or right whichever direction is closer.

* Red fan beam image is for explanation purposes only.
The actual search beam is an eye-safe Class 1 invisible laser.

Cloud-based Solutions for Precise Positioning*

Advanced six-prism configuration provides unsurpassed measurement precision due to a minimum offset of each prism center. ATP1 fits a range pole; ATP1S sliding prism is designed for a pin pole



ATP1 360° Prism




ATP1S Sliding Prism



Waterproof, Rugged, and Operator Friendly


- IP65 dustproof / waterproof rating.
- Metal chassis and heavy duty handle.
- Standard usage temperature range -20 to +50°C.



- New star key [★] instantly brings up functions.
- Trigger key lets you take a series of measurements without removing your eye from the telescope.
- Control panel consists of 10-key pad with color LCD touch screen display.
- USB type A / mini B ports as well as serial ports.



- Green / Red telescope guide lights provide efficient guidance in a range up to 150m.



MAGNET™

Cloud-based Solutions for Precise Positioning


MAGNET™ is a software family that uses the “cloud” to seamlessly connect the field and office for data exchange, communications, asset tracking and more.

Real-time connections. When you need it. Where you need it.

MAGNET™ Field

Data collection, stakeout, roads, and coordinate geometry.

MAGNET™
Field

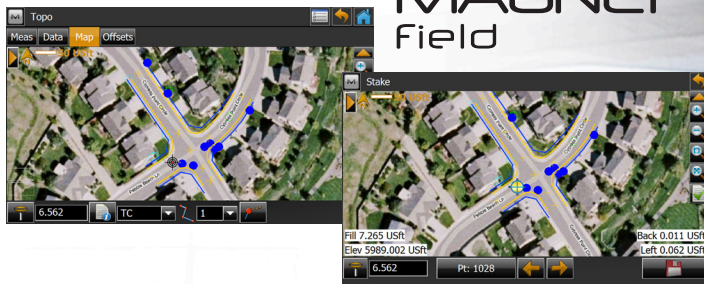

TSshield™

Every SX total station is equipped with a telematics-based multifunction communications module providing the ultimate security and maintenance capabilities for your investment.

If an activated instrument is lost or stolen, you can send a coded signal to the instrument and disable it – Your total station is secure anywhere in the world!

And, in the same module, you have daily connectivity to cloud-based Sokkia servers that can inform you of available software updates and firmware enhancements.

*For more detail of TSshield, please refer to the TSshield's leaflet.



| Product Type | | Auto-Tracking Model |
|---|-------------------------------|--|
| Model | | SX105T |
| Rotation Speed / Auto-Tracking Speed | | 85°/sec (at 20°C) / 20°/sec |
| Operating Range | | ATP1/ATP1S 360° Prism: 2 to 600m (6.6 to 1,969ft.), CP01 mini prism: 1.3 to 700m (4.3 to 2,297ft.), OR1PA mini prism: 1.3 to 500m (4.3 to 1,640ft.), AP prism: 1.3 to 1,000m (4.3 to 3,281ft.) |
| Angle Measurement | | |
| Minimum Reading | | 1" / 5" |
| Angle Measurement | | 5" |
| Tilt Compensation | | Dual Axis, Compensation Range: ±6' |
| Distance Measurement | | |
| Prism | Measuring Range | ATP1/ATP1S 360° Prism: 1.3 to 1,000m (4.3 to 3,281ft.), CP01 mini prism: 1.3 to 2,500m (4.3 to 8,200ft.), OR1PA mini prism: 1.3 to 500m (4.3 to 1,640ft.), AP prism: 1.3 to 6,000m (4.3 to 19,685ft.) under good conditions ^{*1} |
| | Accuracy | ±(1.5mm + 2ppm x D) mm (D=measuring distance in mm) |
| Reflective Sheet Target | Measuring Range ^{*3} | 1.3 to 500m (4.3 to 1,640ft.) with RS90N-K reflective sheet |
| | Accuracy ^{*3} | ±(2mm + 2ppm x D) mm |
| Reflectorless | Measuring Range ^{*2} | 0.3 to 1,000m (1 to 3,281ft.) under good conditions ^{*1} |
| | Accuracy ^{*2} | ±(2mm + 2ppm x D) mm |
| Interface and Data management | | |
| Operating System / Processor | | Microsoft Windows® CE 6.0 |
| Display | | 3.5in. / Transmissive TFT QVGA color LCD |
| Memory | | 500MB internal memory, USB flash memory (up to 8GB) |
| Interface | | USB2.0 (Type A/mini B) / RS-232C |
| Wireless Communication | | |
| Bluetooth® Class 1 | | Communication range: 600m (1,969ft.) ^{*4} |
| General | | |
| Dust/Water Protection | | IP65 (IEC 60529:2001) |
| Operating Temperature | | -20°C to +50°C |
| Laser Pointer | | Coaxial red laser pointer using EDM measuring beam, Class 3R laser |
| Guide Light | | Green and Red LED, Working range: 1.3 to 150m (4.3 to 492ft.) |
| Size | | W230 x D207 x H393mm (W9.1 x D8.2 x H15.5in.) |
| Weight | | Approx. 6.9kg (15.2 lb.) |
| Power supply | | |
| BDC70 Standard Battery | | 7.2V, 5.2Ah |
| Operating Time | | Approx. 4 hours ^{*5} |
| Signal source / Laser output | | Red laser diode (690nm) / Reflectorless mode: Class 3R, Prism / Sheet mode: Class 1 equivalent |
| RC-PR5 Remote Control System (Option of Auto-Collimating Model) | | |
| Operating Range (slope distance) | | Far mode: 2 to 300m (6.6 to 984ft.) / Standard mode: 2 to 100m (6.6 to 328ft.) |
| Measuring Time | | 15 sec |

*1 Condition 1: No haze with visibility about 40km, overcast with no heat shimmer.

*2 Fine mode. With Kodak Gray Card White Side (90% reflective). Brightness level at object surface: ≤500 lx. When brightness on measured surface is 30,000 lx. or less. Reflectorless range/accuracy may vary according to measuring objects, observation situations and environmental conditions.

*3 When the measuring beam's incidence angle is within 30° in relation to the reflective sheet target.

*4 Wireless communication range may vary depending on obstruction and other environmental conditions.

*5 In continuous face-1 and face-2 observations by using Auto-Collimating.

Standard Accessories

- SX main unit
- Battery (BDC70)
- Battery charger (CDC68)
- Power Cable
- Operation manual
- USB memory
- Carrying case
- Carrying strap
- Lens cap
- Lens hood
- Tool pouch
- Screwdriver
- Lens brush
- Adjusting pin x2
- Cleaning cloth
- Laser caution sign-board



SOKKIA

SOKKIA CORPORATION

16900 W. 118th Terrace Olathe, KS 66061
Phone (800) 4-SOKKIA Fax: (913) 492-4900
www.sokkia.com

Specifications subject to change without notice
©2012 Topcon Corporation All rights reserved.

- Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.
- Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license.
- Other trademarks and trade names are those of their respective owners.
- Designs and specifications are subject to change without notice.
- Product colors in this brochure may vary slightly from those of the actual products owing to limitations of the printing process.

Your local Authorized Dealer is: